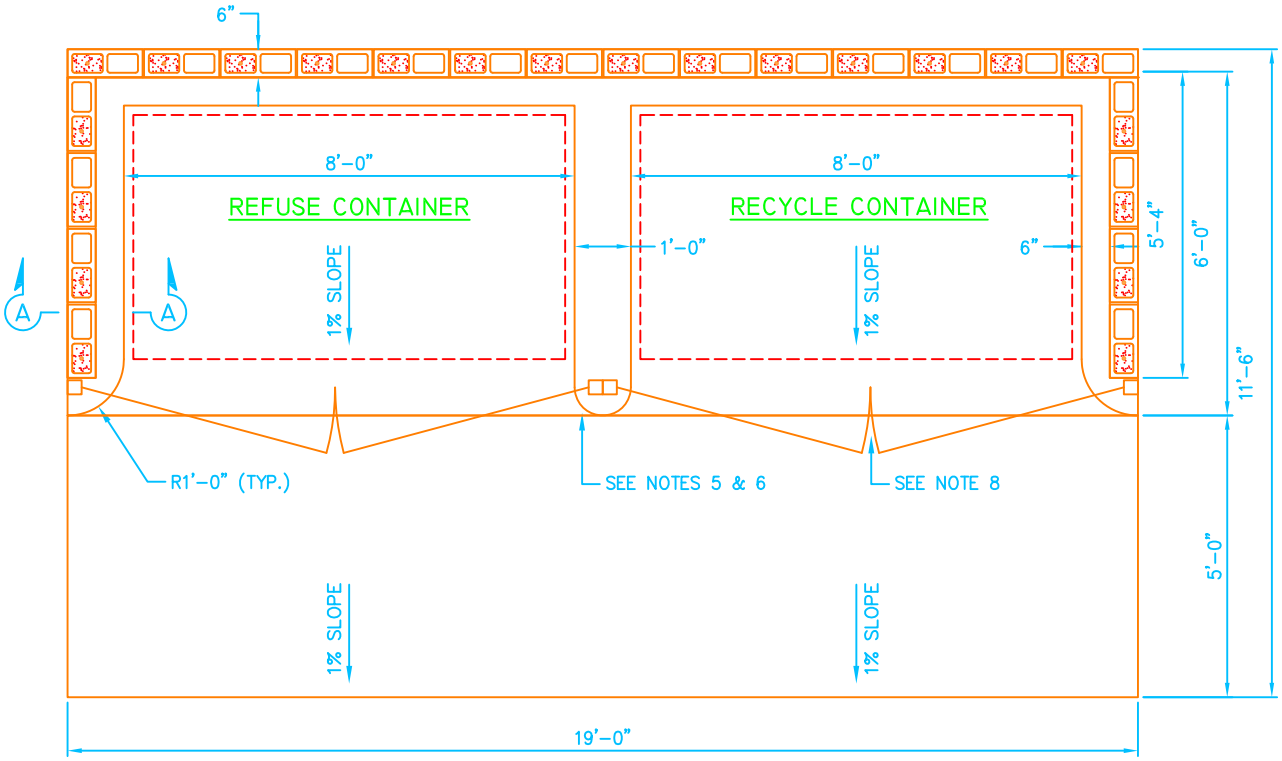

NOTES:

1. ALL CELLS IN CONCRETE BLOCKS WITH STEEL SHALL BE FILLED SOLID WITH COARSE GROUT.
2. CORNER BLOCK ENDS AND CENTER WEB SHALL BE CUT TO FORM CONTINUOUS BOND SEAM.
3. ALL HORIZONTAL AND VERTICAL JOINTS SHALL BE RAKED TO MATCH CENTER SCORED BLOCK.
4. CONCRETE BLOCK, MORTAR AND COARSE GROUT SHALL CONFORM WITH THE CURRENT EDITION OF THE CALIFORNIA BUILDING CODE.
5. 6" CONC. SLAB FLOOR AND FOOTING SHALL BE 2500 PSI (5 SACK MIX) PORTLAND CONCRETE CEMENT.
6. 6" CONC. SLAB TO BE FLUSH WITH A.C. PAVEMENT.
7. GROUND SHALL BE SLOPED AWAY FROM ENCLOSURE WALLS.
8. TRASH ENCLOSURE GATES SHALL HAVE ACCESSIBLE DOOR OPERATING HARDWARE. DESIGN AND MATERIALS PER APPROVAL OF CITY ENGINEER.
9. ACCESSIBLE PATH OF TRAVEL REQUIRED FROM BUILDING TO ENCLOSURE. PATH OF TRAVEL SHALL BE STRIPED WHERE IT CROSSES VEHICULAR TRAVEL WAY. 5'-0" CONCRETE PAD IN FRONT OF ENCLOSURE MUST BE SEPARATE FROM VEHICULAR TRAVEL WAY.

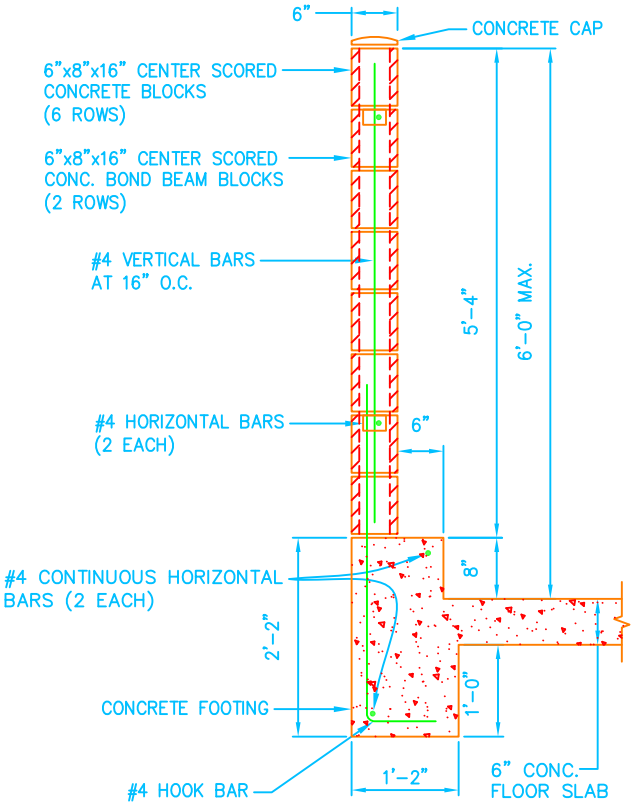

SECTION A-A

APPROVED BY:

Date

PUBLIC WORKS DIRECTOR DATE

REFUSE AND RECYCLING ENCLOSURE

R-1